

WOODS

LANDSCAPE EQUIPMENT



A full line of tools to tackle
a variety of yard, garden and landscape projects

WOODS

Table of Contents

Box Scrapers	4	Disc Harrows	20
From the reinforced steel A-frame to the tough, reversible cutting edge, our Woods and Gannon brand box scrapers deliver exceptional quality and versatility.		Whether breaking ground or tilling existing plots, Woods disc harrows are a rugged must-have tool for gardens, nurseries, food plots and small-acreage farms.	
Grading Scrapers	8	Rotary Tillers	22
Woods grading scrapers are designed to handle more material in fewer passes.		Woods' line of forward and reverse rotation tillers couple the best design features with outstanding performance for your landscaping and gardening projects.	
Rear Blades	10	Post Hole Diggers	26
Grading dirt or driveways, cleaning up construction sites, or moving snow – rely on Woods durable rear blades for maximum performance.		Whatever the soil conditions, count on Woods post hole diggers for tree and shrub planting, deck or fence post installation and many other digging needs.	
Landscape Rakes	14	Chippers	28
Woods landscape rakes are built for both tough clean-up jobs and fine raking.		Woods chippers and chipper/shredders are PTO-driven with a three-point hitch mount to make quick work of creating mulch for your garden or clearing new-growth trees.	
Seeders	16	Stump Grinders	30
The versatile Food Plot Seeder and Precision Super Seeder can handle primary seeding, over-seeding, inter-seeding, and applications such as native grasses and food plots.		Reduce tree stumps to mulch in minutes and grind below ground level with a Woods PTO-powered stump grinder.	
Cultipackers	18	Commercial Kinetic Log Splitter	31
This easy to use seed bed tool improves seed-to-soil contact for higher germination rates.		Kinetic technology isn't new, but it's the wave of the future in fast, clean log splitting.	
Quick Hitch	19		
Woods Quick Hitch makes easy work of changing from one three-point attachment to another.			

Power to be more productive

Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain, and built to last. That's what Woods delivers.

We build a full line of tools to tackle a variety of projects, such as putting in a new garden, reshaping a driveway, or seeding a lawn. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.

Put it all together and you've got Woods Power — the power to be more productive.

Woods

GENUINE PARTS

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.



DHS64

Shown with optional
mud scrapers

WOODS

Box Scrapers

Box Scrapers



Tackle the toughest spreading and grading jobs with Woods® and Gannon® brand box scrapers. From the reinforced steel A-frame to the tough, reversible cutting edge and replaceable scarifiers, our box scrapers deliver exceptional durability and versatility.

- Easily carve into sod and dirt with full-length, high-strength double beveled cutting edges
- Tackle the most rugged jobs with high-strength moldboards
- Choose widths from 48 to 96 inches to suit a variety of jobs
- Ensure faster, easier and safer hook-ups with ASABE Quick-Hitch compatibility

Tractor HP range:
Up to 25 hp

Models

GBC48 48-inch

- Three-point hitch: Cat 0, Limited 1 and 1
- End Plates: .179-inch
- Half-inch by six-inch reversible beveled cutting edges
- Four adjustable, three-position scarifiers
- Fourteen and one-half-inch moldboard

Tractor HP range:
Up to 45 hp

Models

BSS54 54-inch
BSS60 60-inch
BSS65 65-inch
BSS72 72-inch

- Three-point hitch: Cat 1
- End plates: .375-inch
- Heavy steel plate A-frame mast
- Reversible/replaceable high-carbon cutting edges



BSM84

Tractor HP range: 40 - 65 hp

Models

BSM72 72-inch

BSM84 84-inch

- Three-point hitch: Cat 1 and 2
- The BSM Series offers an optional floating, hinged tailgate to provide maximum down force on the cutting edge
- End plates: .5-inch
- Quarter-inch plate welded inside of end plates to increase life

Specifications	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
Tractor Engine HP	up to 25 hp	up to 45 hp				40–65 hp	
Tractor Hitch	Cat 0, Limited 1 & 1	Cat 1				Cat 1 & 2	
Working Width	48"	54"	60"	65"	72"		84"
Weight	285 lbs	486 lbs	514 lbs	528 lbs	551 lbs	680 lbs	750 lbs
Capacity	6.8 cu ft	10.3 cu ft	11.5 cu ft	12.5 cu ft	13.8 cu ft	13.8 cu ft	16.2 cu ft
End Plate Thickness	0.179"	0.375"				0.5"	
Moldboard Thickness	0.188"					0.25"	
Scarifier Depth	0"–1.5"	0", 1.5" or 3" adjustable					
Number of Scarifiers	4	4	5	5	6	6	7
Tailgate Type	fixed					fixed, floating optional	
Reversible Cutting Edge (Qty/Size)	(2) 0.5" x 6"						
ASABE Quick-Hitch Compatible	yes						

Industrial Box Scrapers

Tractor HP range:
40 - 100 hp

Take advantage of the Gannon® name recognized throughout the construction industry as having superior durability, quality and strength.

- Ideal for landscapers, farmers, contractors, and municipalities
- Scarify, level, grade and backfill

Industrial Box Scrapers




92HSD

Specifications	72HSD	76HSD	80HSD	84HSD	88HSD	92HSD	80HXD	84HXD	88HXD	92HXD	96HXD	
Tractor Engine HP	40–90 hp						40–100 hp					
Tractor Hitch	Cat 2											
Working Width	72"	76"	80"	84"	88"	92"	80"	84"	88"	92"	96"	
Height	24.5"											
Operating Weight	1,230 lbs	1,247 lbs	1,263 lbs	1,280 lbs	1,297 lbs	1,310 lbs	1,236 lbs	1,280 lbs	1,297 lbs	1,310 lbs	1,327 lbs	
Depth	40.188"											
Heaped Capacity	25.7 cu ft	27.0 cu ft	28.6 cu ft	30.0 cu ft	31.6 cu ft	32.9 cu ft	28.6 cu ft	30.0 cu ft	31.6 cu ft	32.9 cu ft	34.3 cu ft	
End Plate Thickness	0.5"											
Replacement End Plate Wear Bits	yes						no					
Reversible Cutting Edge (Qty/Size)	(2) 0.5" x 6"											
Number of Scarifiers	8											
Optional Tailgate	–	–	–	–	–	–	–	–	–	–	–	

Backfill Moldboard

Available in full height (shown) for maximum strength and capacity, or hinged tailgate for precise grading

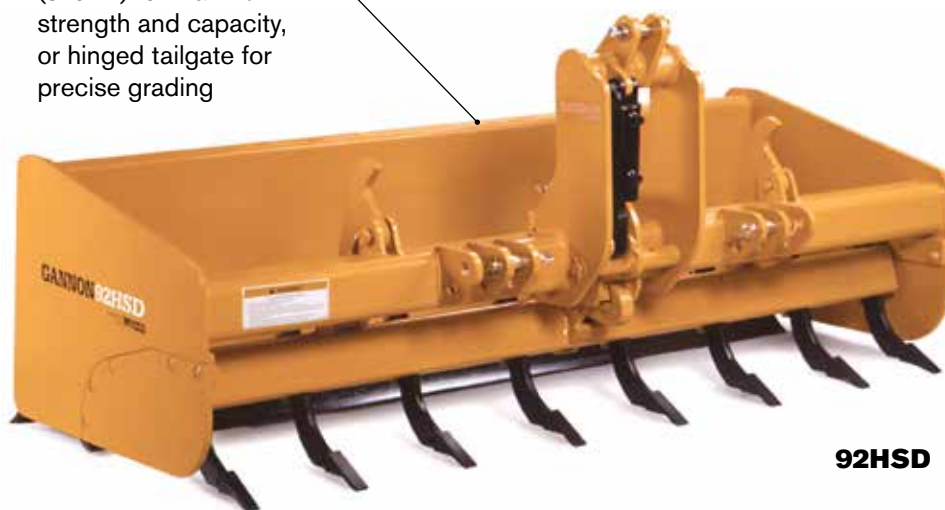

92HSD

Interchangeable and Reversible Cutting Edges

Strong, wear-resistant cutting edges are interchangeable and reversible

Industrial 4 x 2 and 4 x 4 Series

- Three-point hitch: Cat 1 and 2
- Available in 65- to 96-inch widths
- Large capacity box — no gussets or bars to obstruct material boiling
- Unique “Maxi-load” shape moldboard minimizes tractor drag
- Replaceable, heat-treated scarifier teeth and replaceable side-wear plates available (on some models)
- Reversible/replaceable high-carbon cutting edges

65LB	65HB	72LB	72HB	76LB	76HB	80LB	80HB	84HB
40–80 hp								
Cat 1 & 2								
65"		72"		76"		80"		84"
19.313"	24.5"	19.313"	24.5"	19.313"	24.5"	19.313"	24.5"	
925 lbs	1,020 lbs	1,002 lbs	1,100 lbs	1,040 lbs	1,140 lbs	1,075 lbs	1,170 lbs	1,200 lbs
39.5"								
20.8 cu ft	23.2 cu ft	23.0 cu ft	25.7 cu ft	24.3 cu ft	27.3 cu ft	25.7 cu ft	28.6 cu ft	30.0 cu ft
0.5"								
no								
(2) 0.5" x 6"								
6		8						
yes								

WOODS

Grading Scrapers

Grading Scrapers



GSS72P

Ideal for jobs like leveling potholes in gravel driveways or smoothing soil berms after installing field tile.

- Heavy-duty mast plate creates more down force for smoother surface and virtually eliminates washboard effect
- Adjustable skid shoes and scarifiers increase performance
- Tall side frames hold more material for leveling
- Approachable leading edges and structural reinforcements keep scraper stronger for longer
- Reversible/replaceable high-carbon cutting edges

Tractor HP range:
14 - 45 hp

Models

GSS54/GSS54P	53-inch
GSS60/GSS60P	59-inch
GSS72/GSS72P	71-inch

- Three-point hitch: Limited Cat 1 and 1
- Fourteen- and sixteen-inch box height
- Fast, easy and safe hook-ups with ASABE Quick-Hitch compatibility

Tractor HP range:
30 - 65 hp

Models

GSM84/GSM84P	83-inch
GSM96/GSM96P	95-inch

- Three-point hitch: Cat 1 and 2
- Sixteen-inch box height — one of the tallest in the industry
- Fast, easy and safe hook-ups with ASABE Quick-Hitch compatibility



All models available without scarifiers when deep tillage is unnecessary. Grading scrapers without scarifiers have no shank pockets.

Heavy Mast Plate

Solid mast plate provides increased weight for greater down force and constant ground contact

Reinforced Back

Reinforcement bar maintains strength and handles heavier material without compromising structure

GSM96P**Replaceable Scarifiers**

Replaceable scarifiers with hardened points increases durability and versatility

Adjustable Skid Shoe

Replaceable, heavy skids wear longer. Outside adjustment allows for quick changes

Specifications	GSS54/ GSS54P	GSS60/ GSS60P	GSS72/ GSS72P	GSM84/ GSM84P	GSM96/ GSM96P
Tractor Engine HP	15–30 hp	20–45 hp		30–65 hp	
Tractor Hitch	Limited Cat 1 & 1	Cat 1		Cat 1 & 2	
Working Width	53"	59"	71"	83"	95"
Overall Width	58"	64"	76"	88"	100"
Overall Length	42"	46"			
Box Height	14"	16"			
Weight (without scarifiers)	349 lbs	493 lbs	580 lbs	664 lbs	712 lbs
Weight (with scarifiers*)	409 lbs	553 lbs	655 lbs	754 lbs	802 lbs
Number of Scarifiers*	4		5	6	6
Scarifier Adjustments*	-4.0, -2.5, -1.0, +1.0	-2.5, -1.0, +0.5, +2.5			
Reversible Cutting Edge (Qty/Size)	(2) 0.5" x 6"				
Skid Shoe Adjustments	-0.75 to +0.75	-1.0 to +0.5			
Lower Hitch Design	clevis				
ASABE Quick-Hitch Compatible	yes				

*Premium models only: GSS54P, GSS60P, GSS72P, GSM84P and GSM96P

WOODS

Rear Blades



RBS84P

Shown with optional parking stand

Tractor HP range:
Up to 45 hp

Models

RBS54 53-inch
RBS60 59-inch
RBS72 71-inch

Models

RBS60P 59-inch
RBS72P 71-inch
RBS84P 83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°
- Double-beveled, reversible, bolt-on cutting edge adds to product life and enables easy replacement
- Optional skid shoes for depth control, and optional parking stand for easier attachment

Ideal for grading dirt or gravel, cleaning up construction sites and moving snow.

Tractor HP range:
30 - 65 hp

50 - Series Rear Blades

Models

RB72.50 71-inch
RB84.50 83-inch
RB96.50 95-inch

NEW
2017

- Seventeen-inch high, 1/4-inch thick moldboard
- Double-beveled, reversible, and hardened cutting edge for long life
- Fully manual offers angle, offset, and tilt adjustments
- Optional end plates, skid shoes, and hydraulic angle kit (includes relief valve)
- Convenient parking stand is standard



Tractor HP range: 40 - 85 hp

60 - Series Rear Blades

Models

RB84.60 83-inch
RB96.60 95-inch

NEW

2017

- Seventeen and a half-inch high, 5/16-inch thick moldboard
- Double-beveled, reversible, and hardened cutting edge for long life
- Choose manual or hydraulic, featuring angle, offset, and tilt adjustments
- Optional end plates, skid shoes, tailwheel, and selector valve
- Convenient parking stand is standard

Tractor HP range: 50 - 100 hp

Models

RB750 83-inch
RB850 95-inch

- Three-point hitch: Cat 2
- Seventeen-inch high, reinforced moldboard
- Optional end plates, skid shoes, and tailwheel
- Standard parking stand



RB72.50

Shown with optional hydraulic angle kit.

Tractor HP range: 80 - 150 hp

Models

RB990 107-inch
RB1010 119-inch

- Three-point hitch: Cat 2 and 3
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset)
- Tough, dozer-type full box construction
- Eighteen-inch high, reinforced mold-board for maximum material loading
- Optional tailwheel
- Standard parking stand

Rear Blades



RB96.60

Shown with optional hydraulic adjustment and selector valve

NEW
2017

Specifications	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P	RB72.50	RB84.50	RB96.50
Tractor Engine HP	up to 30 hp			20-45 hp			30-65 hp		
Tractor Hitch	Limited Cat 1 & 1			Cat 1			Cat 1 & 2		
Working Width	53"	59"	71"	59"	71"	83"	71"	83"	95"
Moldboard Height	12"			15"			17"		
Moldboard Thickness	0.182" (grade 80 steel)			0.125" (grade 80 steel)			0.25" (grade 80 steel)		
Weight	134 lbs	142 lbs	156 lbs	268 lbs	288 lbs	308 lbs	455 lbs	475 lbs	495 lbs
Double-beveled, Reversible Cutting Edge Dimensions	0.375" x 6"			0.5" x 6"			0.5" x 6"		
Angle Adjustments	5 positions up to 30°						7 positions up to 45° (mech or hyd)		
Offset Adjustments	—	—	—	up to 12" left or right			6", 12", 18" left or right		
Tilt Adjustments	—	—	—	up to 15°			5 positions up to 23°		
End Plates	—	—	—	optional			optional		
Skid Shoes	optional						optional		
Tailwheel	—	—	—	—	—	—	—		
Parking Stand	optional						standard		
ASABE Quick-Hitch Compatible	yes						yes		


NEW
2017



RB1010
Shown with optional tailwheel

RB84.60		RB96.60		RB750		RB850		RB990		RB1010	
40-85 hp				50–100 hp				80–150 hp			
Cat 1 & 2				Cat 2				Cat 2 & 3			
83"		95"		83"		95"		107"		119"	
17.5"				17"				18"			
0.313" (grade 80 steel)				0.313"				0.25"			
705 lbs		730 lbs		1193 lbs		1233 lbs		1,483 lbs		1,535 lbs	
0.5" x 6"				0.5" x 6"							
up to 45° (mech or hyd)				9 forward up to 60°; 5 reverse up to 30° (mech or hyd)				up to 60° (hyd)			
up to 20" (mech or hyd)				up to 24" (mech or hyd)				up to 33" (mech or hyd)			
up to 23° (mech or hyd)				up to 30° (mech or hyd)				up to 28° (mech or hyd)			
optional				optional				—		—	
optional				optional				—		—	
optional				optional							
standard				standard							
yes				yes							

Landscape Rakes

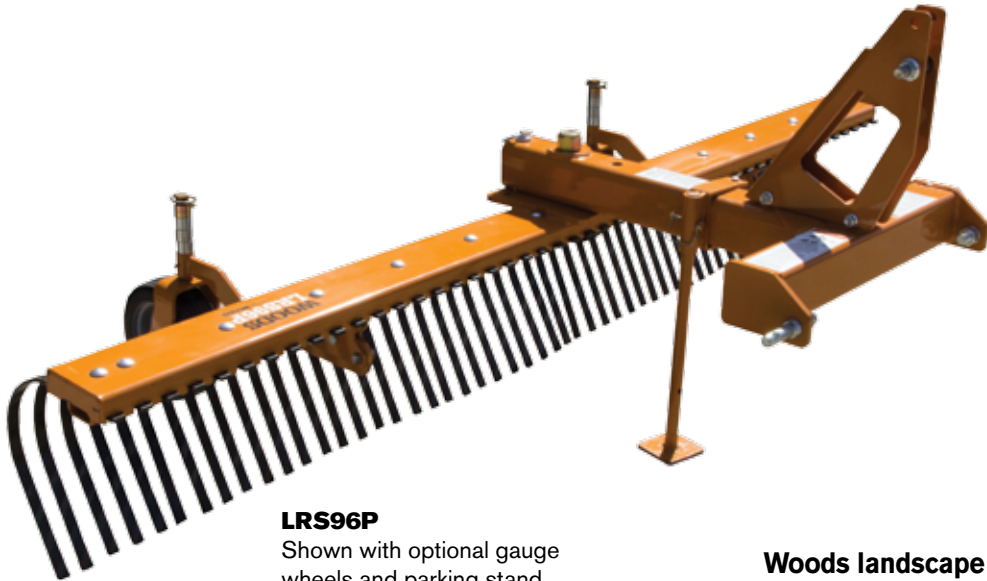

LRS96P

Shown with optional gauge wheels and parking stand

**Tractor HP range:
Up to 45 hp**

Models

LRS52 52-inch
LRS60 60-inch
LRS72 72-inch

Models

LRS72P 72-inch
LRS84P 84-inch
LRS96P 96-inch

- Heavy pivot components increase product longevity
- Large, structural tine beam channel holds alloy spring steel tines firmly
- Fast, easy and safe hook-ups with ASABE Quick-Hitch compatibility
- Optional gauge wheels allow better depth control and optional parking stand for easier attachment

Woods landscape rakes are built with rugged durability for tough clean-up jobs, as well as fine raking features for light-duty lawn care and general maintenance.

- High-strength, box-type beams and spring-steel tines handle rocks, dirt, and sand
- Adjustable angles and 360-degree pivot control flow of material to left, right, or center
- One-inch tine spacing provides superior material collection for a smooth, even grade
- Optional dual-gauge wheels for depth control



Specifications	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
Tractor Engine HP	up to 30 hp			20–45 hp		
Tractor Hitch	Limited Cat 1 & Cat 1			Cat 1		
Working Width	52"	60"	72"	72"	84"	96"
Weight	156 lbs	168 lbs	186 lbs	264 lbs	288 lbs	311 lbs
Pivot Angle	5 positions up to 30°					
Tine Dimensions	5/16" x 1"					
Tine Spacing	1"					
Gauge Wheels	optional					
ASABE Quick-Hitch Compatible	yes					
Parking Stand	optional					

Food Plot Seeders



FPS72

Tractor HP range:
25 - 45 hp

Models

FPS48	49-inch
FPS60	60-inch
FPS72	72-inch
FPS84	84-inch

Plant up to three types of seed in one pass. Ideal for hunters and small acreage farmers seeding legumes and larger seeds.

- Three seed box choices — one cool season and two legume — can plant a variety of seeds like alfalfa, clover, corn, sorghum, soybeans, turnips and wheat
- A trailing cultipacker firms the seed bed for perfect seed-to-soil contact that's ready to trap moisture for germination
- Plant cool season seeds, in rows, at a deeper depth while evenly broadcasting up to two types of legume seeds at a shallow depth — all in one pass

Specifications	FPS48	FPS60	FPS72	FPS84
Tractor Engine HP	25–40 hp	30–45 hp	30–75 hp	35–85 hp
Tractor Hitch	Cat 1 & 2			
Working Width	49"	60"	72"	84"
Weight (standard configuration*)	821 lbs	899 lbs	1,196 lbs	1,320 lbs
Weight (fully configured**)	1,084 lbs	1,222 lbs	1,578 lbs	1,762 lbs
Number of Seed Boxes Available	3			
Seed Box Ratio	1-speed			
Seed Cups (7" spacing)	7	8	10	12
Row Units	standard			
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75
Disc Blades (diameter/quantity)	16" (8)		18" (10)	18" (12)
Cast Iron or Nylon Trailing Cultipacker	Optional (9.5" diameter cast iron or 11" diameter nylon)			
Calibration Tray & Crank Handle	standard			
Mud Scrapers & Frame Platform	optional			
ASABE Quick-Hitch Compatible	yes			

* Includes spiked drive roller, notched disc blades, cool season seed box, and row units.

** Includes cultipacker drive roller, notched disc blades, cool season seed box, row units, 1st and 2nd legume seed boxes, and nylon trailing cultipacker.

Precision Super Seeders

Versatile and flexible to easily handle primary seeding, over-seeding, and applications such as native grasses and food plots.

- Three seed box options — cool season, warm season, and legume — let you plant anything from rye and oats to prairie grasses, wild flowers, radishes and soybeans
- Efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth with models equipped with three seed boxes
- All seed boxes can be engaged and disengaged independently with a single lynch pin — no tools required

Tractor HP range:
25 - 45 hp

Tractor HP range:
30 - 85 hp

Models

PSS48 49-inch
PSS60 60-inch

Models

PSS72 72-inch
PSS84 84-inch



Specifications	PSS48	PSS60	PSS72	PSS84
Tractor Engine HP	25–40 hp	30–45 hp	30–75 hp	35–85 hp
Tractor Hitch	Cat 1 & 2			
Working Width	49"	60"	72"	84"
Weight (standard configuration*)	779 lbs	861 lbs	1,132 lbs	1,249 lbs
Weight (hunting edition configuration**)	1,044 lbs	1,222 lbs	1,565 lbs	1,761 lbs
Number of Seed Boxes Available	3			
Seed Metering	fluted and picker wheel			
Seed Cups (7" spacing)	7	8	10	12
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00
Native Warm Season Seed Box Capacity (bushel)	5.00	6.25	7.50	8.75
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75
Front Roller Spikes	(128) 0.5" x 2" carbide steel	(160) 0.5" x 2" carbide steel	(192) 0.5" x 2" carbide steel	(224) 0.5" x 2" carbide steel
ASABE Quick-Hitch Compatible	yes			

* Standard configuration consists of frame with spiked drive roller, adjustable front spiked rollers and cool season seed box

** Hunting Edition configuration consists of frame with spiked, ground drive roller, adjustable front disc blades, cool season seed box, legume seed box and cast iron cultipacker

WOODS

Cultipackers



Tractor HP range:
20 - 75 hp

Models

C48T 48-inch
C72 72-inch
C84 84-inch



Cultipacker Video

Learn more about our rugged, easy-to-use cultipackers on the Woods Equipment channel on YouTube®.

Specifications	C48T	C72	C84
Tractor Engine HP	up to 30 hp	20-75 hp	
Hitch Type	pull-type	3-pt	
Hitch Category	2" ball	Cat 1 & 2	
Working Width	48"	72"	84"
Overall Width	67"	82"	94"
Length	58" (with tongue)	15.75" (3-pt hitch); 91.5" (with tongue)	
Weight	275 lbs	371 lbs	420 lbs
Cultipacker Wheel Quantity	21	32	37
Transport Tires (pneumatic)	standard (10" x 3.25")	optional (10" x 3.25")	
Weight Rack	standard	n/a	
Parking Stand	n/a	standard	
Mud Scrapers	n/a	optional	

Woods' new cultipacker is a high quality seed bed tool backed by our reputation for durability and reliability.

- Attaches to ATVs, UTVs and tractors up to 75 hp
- Notched, cast-iron cultipacker wheels provide the perfect seed-to-soil contact to trap moisture for higher germination rates
- Flip-over hitch easily changes from towing to working the dirt
- Rugged frame and axle are designed for durability
- Greasable, triple-sealed bearings are easy to maintain and extend work life
- Tow tires and weight rack are standard on C48T model
- Parking stand is standard on C72 and C84 models; add optional tow kit and mud scrapers for greater versatility and productivity



C84



C48T

Quick Hitch

Woods TQH1 quick hitch makes easy work of changing from one 3 - point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket
- Seven-eighths - inch mounting pins and adapter bushings
- Lower arms lock automatically
- Ensure faster, easier and safer hook-ups with ASABE quick-hitch compatibility




Specifications	TQH1
Tractor Hitch	Cat 1
Width	27.25"
Weight	75 lbs
Mounting Pin Diameter	0.875"
Adapter Bushing Diameter	1.44"

Disc Harrows



DHS64
Shown with optional
mud scrapers

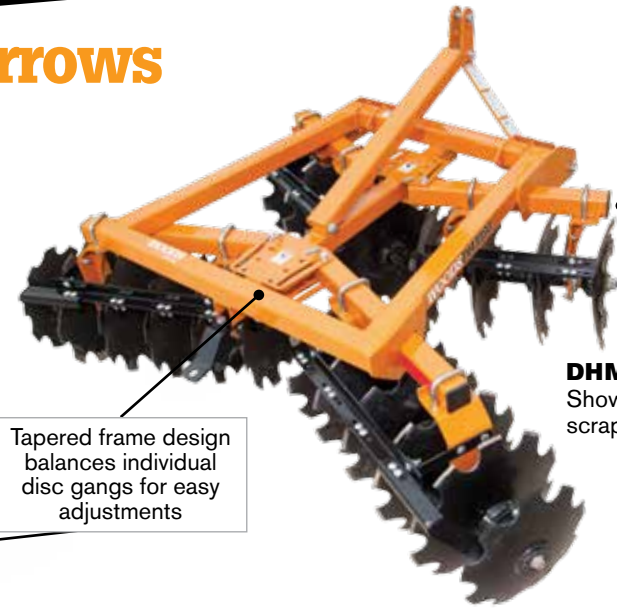

Tapered frame design
balances individual
disc gangs for easy
adjustments

DHM80
Shown with optional mud
scrapers and furrow fillers



Specifications	DHS48	DHS64	DHS80	DHM80	DHM96
Tractor Engine HP	up to 35 hp	25-45 hp	35-55 hp	45-75 hp	55-85 hp
Tractor Hitch	Cat 1, Lim. Cat 1, Cat 0 optional	Cat 1		Cat 1 & 2	
Width	48"	64"	80"	80"	96"
Weight (depends on blade type)	390 lbs	508 lbs	590 lbs	845 lbs	960 lbs
Disc Blade Type	notched	notched; or combination smooth and notched		notched; or combination smooth and notched	
Average Weight per Blade	33 lbs	36 lbs	33 lbs	47 lbs	44 lbs
Disc Diameter / Quantity	16" / 12	18" / 14	18" / 18	20" / 18	20" / 22
Disc Spacing	7.5" front and rear	9" front, 7.5" rear		9" front, 7.5" rear	
Gang Axle Diameter	1" square	1 1/8" square			
Frame Construction	3" x 3" tube and angle		3" x 3" tube and channel	3" x 3" tube	
ASABE Quick-Hitch Compatible	yes				

All models feature independent disc gangs that easily angle from 0 to 21 degrees to match your soil type and tilling job

DHH108T

Shown with optional mud scrapers



There's nothing like the smell of fresh-turned dirt, especially when you're doing what you love... working the land.

Whether you're breaking new ground for a garden, or tilling an existing nursery, food plot, vineyard or farm, Woods has the right – the best – disc harrow for your land. You will get years of productive, reliable, dirt-turning work. Built with high-strength U.S. steel, these rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these new discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.

Tractor HP range: Up to 70 hp

Models

DHS48 48-inch
DHS64 64-inch
DHS80 80-inch

- Mud scrapers that prevent clogging, increase productivity
- Furrow fillers (DHS64, DHS80)

Tractor HP range: Up to 70 hp

Models

DHM80 80-inch
DHM96 96-inch

- Furrow fillers to reduce end ridges
- Rear drawbar for towing equipment
- Mud scrapers that prevent clogging, increase productivity

Tractor HP range: 50 - 110 hp

Models

DHH108P 108-inch
DHH126P 126-inch
DHH144P 144-inch

- Advanced offset/tandem blade gangs leave an even finish across entire width – no center ridge
- Extended tongue design allows tight turns without hitting tractor tires
- Simple ratchet jack levels unit from front to back
- Optional rear drawbar for towing equipment
- Optional mud scrapers and furrow fillers to increase productivity

DHH108T

50-75 hp

DHH126T

60-100 hp

DHH144T

70-110 hp

pull-type, 1.25" pin

108"

126"

144"

2,525 lbs

2,690 lbs

2,860 lbs

notched; smooth; or combination

105 lbs

98 lbs

90 lbs

20" or 22" / 24

20" or 22" / 28

20" or 22" / 32

9" front and rear

1 1/8" square

4" x 3" tube

n/a

Disc Harrow Video

See our heavy-duty model in action! If you don't have a SmartPhone you can still see the video on the "Woods Equipment Company" YouTube channel or woodsequipment.com.



WOODS

Rotary Tillers



Woods' line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our 30- and 40-series received the ASABE award for outstanding Innovation in Product or Systems Technology 2017.



- 30- and 40-series models available as either forward or reverse rotation
- On initial pass reverse rotation tillers will often till deeper and faster than forward rotation models
- GHT-series for up to 50 hp, and SGT for up to 70 hp tractors are ideal for commercial applications
- Slip clutch driveline protection is standard on all models
- Skid shoes standard

Tractor HP range:
25-50 hp

40 - Series Rotary Tillers

Models

RT60.40/RTR60.40
RT72.40/RTR72.40

Tractor HP range:
17-35 hp

30 - Series Rotary Tillers

Models

RT42.30/RTR42.30 41-inch
RT48.30/RTR48.30 47-inch

- Innovative double-flange design for blade support
- Gear-driven side drive – less maintenance than chain-driven units
- 3-year warranty on input gearbox (includes seals)
- Rugged, heat-treated c-shaped tines for deep penetration in the toughest soils
- Tapered tailgate removes furrow for a finished seedbed
- Sturdy tubular integrated parking stand for easy storage and setup

Tractor HP range: 20-45 hp

Models

TC60/TCR60	60-inch
TC68/TCR68	68-inch
TC74/TCR74	74-inch

- Three-point hitch: Cat 1
- Specifically designed for compact tractors
- Sturdy rear tailgate evenly distributes dirt - leaves a smooth, flat seed bed
- Strong, cast iron gearbox withstands rugged use
- Solid steel rotor shaft



TCR74

Tractor HP range: 30 - 50 hp

Models

GHT60	57-inch
GHT72	69-inch

- Three-point hitch: Cat 1
- Rotor shaft guard prevents wrapping on end bearing
- Adjustable, six-position skid shoes control tilling depth
- Heavy-duty gear transmission drives blades for added power and extended life
- Cast iron gearbox housing with beveled gears
- Gears with hardened teeth and splined center in enclosed oil bath
- Tapered roller bearings
- Reinforced A-frame for extended life

Tractor HP range: 40 - 70 hp

Models

SGT72	68-inch
SGT80	76-inch
SGT88	84-inch

- Three-point hitch: Cat 2
- Extra heavy-duty gear transmission drives blades in toughest conditions
- Cast iron housing with beveled gears
- Gears with hardened teeth and splined center in enclosed oil bath
- Twenty-position adjustable skid shoes with replaceable wear plates for easy maintenance
- Guard on rotor shaft prevents wrapping on end bearing
- Reinforced A-frame for extended life

Rotary Tillers



RT42.30



Rotary Tillers Video

See our Rotary Tillers in action! If you don't have a SmartPhone you can still see the video on the "Woods Equipment Company" YouTube channel or woodsequipment.com.

Specifications	RT42.30/ RTR42.30	RT48.30/ RTR48.30	RT60.40/ RTR60.40	RT72.40/ RTR72.40	TC60/ TCR60
Tractor PTO HP	17– 30 hp	20– 35 hp	25–40 hp	35–50 hp	20–45 hp
Tractor Hitch	Limited Cat 1 & 1		Cat 1		
Working Width	41"	47"	59"	71"	60"
Overall Width	51"	57"	69"	81"	67"
Weight	478 lbs	502 / 508 lbs	570 / 578 lbs	621 / 630 lbs	597 / 604 lbs
Maximum Tilling Depth	7"				7.5"
Drive Type	gearbox				#80 chain
Total Number of Tines / Flanges	20 / 5	24 / 6	28 / 7	36 / 9	42 / 7
Number of Tines per Flange	4 C-type				6 C-type
Rotor Speed	210 rpm				240 rpm
Tractor PTO Speed	540 rpm				
PTO Driveline Protection	slip clutch				
Gearbox Housing	heavy-duty cast iron				
Gearbox Drain Plug	yes				
Offset (left)	3" fixed		2.25" fixed		adjustable up to 15.5"
Quick-Hitch Compatible	yes				

Woods offers tillers in forward or reverse rotation in 44" — 74" widths.

Forward rotation tillers are ideal for moist, wet, rocky, sandy or loose soil conditions.

Reverse rotation tillers work best in non-rocky soil conditions. They deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt. More often than not, users can achieve an exceptional seed bed with fewer passes when using a reverse rotation tiller.



TC68/ TCR68	TC74/ TCR74	GHT60	GHT72	SGT72	SGT80	SGT88
20–45 hp		30–50 hp		40–70 hp		
Cat 1				Cat 2		
68"	74"	57"	69"	68"	76"	84"
75"	81"	66"	78"	77"	85"	93"
634 / 641 lbs	665 / 672 lbs	611 lbs	686 lbs	878 lbs	961 lbs	996 lbs
7.5"		7.25"		8.25"		
#80 chain		gearbox				
48 / 8	54 / 9	28 / 7	36 / 9	36 / 9	40 / 10	44 / 11
6 C-type		4 C-type (6 optional)				
240 rpm		211 rpm		213 rpm		
540 rpm						
slip clutch						
heavy-duty cast iron						
yes						
adjustable up to 19.5"	adjustable up to 22.5"	–	–	–	–	–
yes	yes	no				

Post Hole Diggers



Heavy-duty welded construction, a rugged gearbox with tapered roller bearings, spring-loaded seals, and forged steel teeth offer the durability you need for big or small jobs — whatever the soil conditions.

- Use for tree and shrub planting, deck or fence post installation, and many other digging needs
- Range of auger bit diameters meet your unique needs — whether landscaping, farming or municipal use

Tractor HP range:
14 - 35 hp

Models

TPD25
TPD35

- Three-point hitch: Cat 0, Limited 1 and 1
- Choose 6-, 9- or 12-inch diameter augers

Tractor HP range:
25 - 65 hp

Models

TPD65

- Three-point hitch: Cat 1 and 2
- Choose 6-, 9-, 12-, 14-, 18- or 24-inch diameter augers



Manual tube

Owner's manual tube retains manual for quick retrieval

Rugged gearbox

Rugged gearbox with tapered roller bearings protects from debris. Six-year gearbox warranty

Wide range of auger bits

Wide range of auger bits provides the best tool for every application

Ductile iron point and forged steel teeth

Provides efficient digging time after time



Tractor HP range:
35 - 95 hp

Models

TPD95

- Three-point hitch: Cat 1 and 2
- Standard shear pin protected shaft extends service life
- Standard positioning handle for easy, one person operation
- Options include parking stand, auger extension, semi-double and double flight augers, and hydraulic down force kit

Augers

Size (Dia x L)		Models	Weight
6" x 36"	standard-duty	TPD25	24
9" x 36"	standard-duty	TPD25	32
12" x 36"	standard-duty	TPD25	39
6" x 48"	standard-duty	TPD35, TPD65, TPD95	33
9" x 48"	standard-duty	TPD35, TPD65, TPD95	42
12" x 48"	standard-duty	TPD35, TPD65, TPD95	49
18" x 48"	standard-duty	TPD35, TPD65, TPD95	99
6" x 48"	heavy-duty	TPD35, TPD65, TPD95	39
9" x 48"	heavy-duty	TPD35, TPD65, TPD95	48
12" x 48"	heavy-duty	TPD35, TPD65, TPD95	60
18" x 48"	heavy-duty	TPD35, TPD65, TPD95	118
24" x 48"	heavy-duty	TPD65, TPD95	150
30" x 48"	heavy-duty	TPD95	181
18" x 48"	heavy-duty (tree)	TPD65, TPD95	86
24" x 48"	heavy-duty (tree)	TPD65, TPD95	130

Specifications	TPD25	TPD35	TPD65	TPD95
Tractor PTO HP	14–25 hp	20–35 hp	25–65 hp	35–95 hp
Tractor Hitch	Cat 0, Limited 1 & 1	Cat 1	Cat 1 & 2	
Weight (without auger)	140 lbs	146 lbs	194 lbs	238 lbs
Drive Type	gearbox			
Tractor PTO Speed	540 rpm			

WOODS

Chippers



Whether you're creating mulch for the garden or clearing new-growth trees, Woods has the best clean-up tool for you.

- PTO-driven with a three-point hitch mount
- Designed to reduce solid material and debris of up to five-inches in diameter to fine mulch

Tractor HP range:
Up to 35 hp

Models **TCH4500 Chipper**

- Three-point hitch: Limited Cat 1 and 1
- Chip capacity of up to 4.5-inch diameter branches
- Heavy-duty, seven-gauge chipper housing for long life
- Manual clutch for tractors with electric PTO
- Easy access to two 5-inch by 4-inch by .375-inch chipper blades for clean-out and adjustment
- Optional discharge chute allows debris to be directed into trailer or truck

Tractor HP range:
15 - 30 hp

Models **5000 Chipper with Shredder feature**

- Three-point hitch: Cat 1
- Four reversible, heat-treated steel blades mounted at 90-degrees for smooth operation, less vibration and longer blade life
- Balanced 125 lb. rotor turns 2,000 RPMs
- Vegetation shredder with thirty-six serrated, free-swinging knives that chip debris up to one-inch in diameter
- Optional blower with 360-degree discharge chute allows debris to be directed into trailer or truck


Tractor HP range: 25 - 60 hp

Models

8000 Chipper

8100 Chipper

- Three-point hitch: Cat 1 and 2
- Chip capacity of up to 8-inch diameter branches with 8000 model and 9-inch diameter with 8100 model
- Triple banded belt drive for better transfer of power
- Balanced 1.25-inch by 30-inch, 275 lb. chipping disc
- Four reversible, heat-treated steel with chrome content chipper blades, mounted at 90-degrees for smooth operation, less vibration and longer blade life
- Easy access to blades for clean-out and adjustment
- Standard electronic feed control sensor on 8100 model maintains optimal engine RPM for chipping different diameter material
- 360-degree rotating blower chute with adjustable cap comes standard

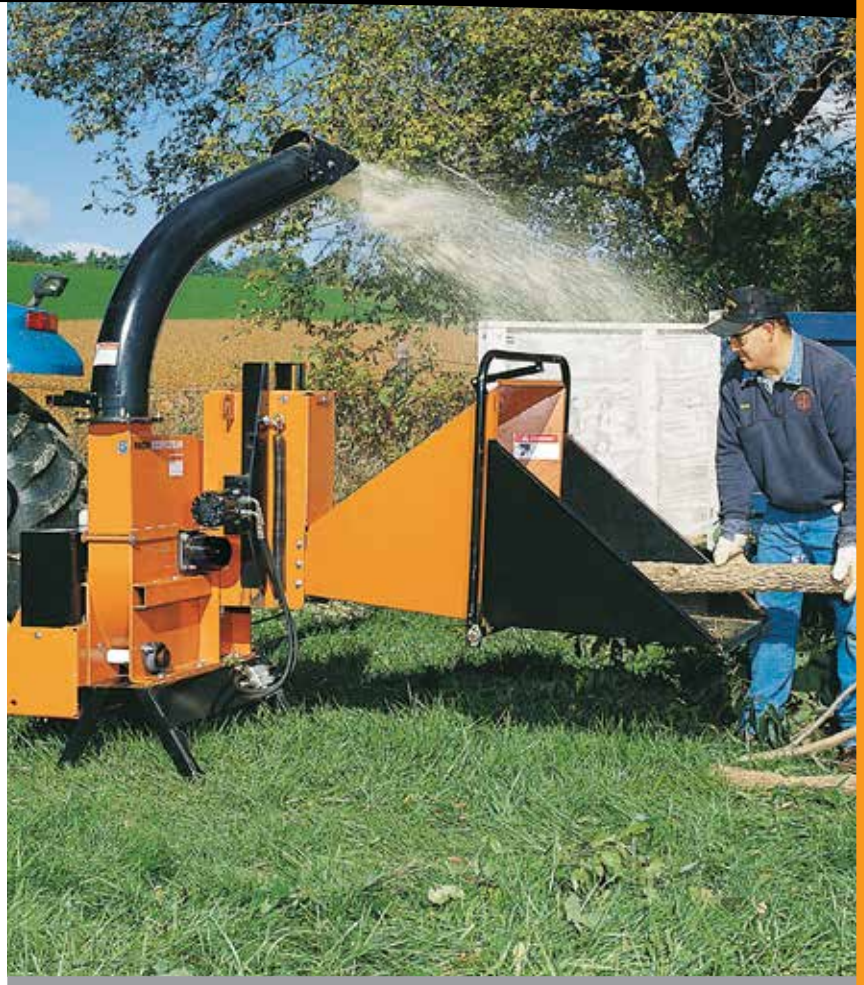

Specifications	TCH4500	5000	8000	8100
Tractor PTO HP	up to 35 hp	15–30 hp	25–60 hp	
Tractor Hitch	Limited Cat 1 & 1	Cat 1	Cat 1 & 2	
Chipping Capacity	4.5" diameter	5" diameter	8" diameter	9" diameter
Shredding Capacity	–	1" diameter	–	–
Weight	392 lbs	450 lbs	885 lbs	1,300 lbs
Feed System	gravity			hydraulic
Feed Rate	–	–	–	0–150 fpm
Tractor PTO Speed	540 rpm			

WOODS

Stump Grinders



Woods PTO-powered stump grinders are built to perform — reducing tree stumps to mulch in minutes and grinding below ground level.

- Mount to 3-point hitch and operate from the safety of the tractor seat
- Slip clutch provides protection against abnormally severe shock loads
- Slim design and long reach allow for access to tight places



Watch our PTO-powered stump grinders chew through stumps in no time. See this video and more at the Woods Equipment channel on YouTube or woodsequipment.com.

Tractor HP range: 15 - 50 hp

Models

TSG50 20-inch cutting wheel

- Three-point hitch: Cat 1 and 2
- Grind stumps 16 inches above and below ground level
- Twenty-four tough, carbide steel teeth cut bi-directionally

Tractor HP range: 50 - 100 hp

Models

SG100 34-inch cutting wheel

- Three-point hitch: Cat 1 and 2
- Cutting wheel is pushed, not pulled, extending life of the bearing and gearbox
- Twenty-five tough, carbide steel teeth cut in one direction

Specifications	TSG50	SG100
Tractor PTO HP	15–50 hp	50–100 hp
Tractor Hitch	Cat 1 & 2	
Cutting Wheel Diameter	20"	34"
Cutting Wheel Speed	1,037 rpm	895 rpm
Cutter Tip Speed	5,428 fpm	7,967 fpm
Tractor PTO Speed	540 rpm	
Weight	545 lbs	1,012 lbs
Hub Torque (lbs / ft)	76–250	450
Horizontal Cut	32"	
Cutting Arc	44°	55°
Max Stump Height	16"	24"
Max Cutting Depth	16"	12"

Commercial Kinetic Log Splitter

Kinetic technology isn't new, but it's the wave of the future in fast, clean log splitting. Kinetic energy is released in a burst that drives the log forward into our 6-inch hardened wedge, splitting the wood in 2 or 3 seconds – 6x faster than hydraulic splitters.

This tremendous increase in splitting speed significantly increases productivity – even on large, tough, gnarled wood. Our innovative features were developed and tested with professional firewood producers, resulting in a tested, proven, unbeatable commercial grade Woods log splitter.



Model KLS

- 2-3 second cycle time
- No hydraulic fluid or parts – easy to maintain
- Precision, heat treated steel alloy rack and pinion gear system made in the USA
- Uses less fuel than hydraulic splitters – saves money
- Two-handed operation from either side
- Patent-pending handle design, with torsion springs – virtually no kick-back
- Retractable tongue and welded-on table hands – easy to move



Commercial Kinetic Log Splitter Videos

Watch the kinetic in action or see a product review from a professional firewood producer at the Woods Equipment channel on YouTube®.

**POWER
TEAM**

Got ideas?
Join our customer panel at woodsequipment.com/power.
You have the power...

WOODS® | A Blount International Brand
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2017 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

